


DN150-250

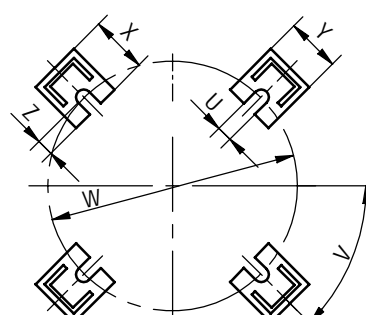

DN100+300

BODENBEFESTIGUNG
BOTTOM FASTENING
FIXATION AU FOND

- BETRIEBSDRUCK**
WORKING PRESSURE
PRESSION DE SERVICE } **MAX. 16 BAR**
- BETRIEBSTEMPERATUR**
WORKING TEMPERATURE
TEMPERATURE DE SERVICE } **MAX. 60°C**
- TOLERANZEN**
TOLERANCE
TOLERANCE } **EN ISO 13920-C**
- ANSCHLUSSFLANSCH**
CONNECTION FLANGES
BRIDES DESIREES } **DIN 2501**

GEHAUSE GESCHWEISST
HOUSING WELDED
CORPS SAUDE

DN	øA	øB	C	D	E	F	G	H	K	L	R	S	U	V	W	X	Y	Z	h	RE	GEWICHT KG	INHALT LTR.
100	355	273	480	300	600	225	895	1565	210	390	DN32	720	24	45°	230	100	80	22	20	G1/4	198	48
150	435	355.6	570	400	700	275	950	1625	255	435	DN32	720	24	35°	330	90	85	28	20		238	83
200	515	419	650	400	750	290	980	1670	285	465	DN32	735	24	40°	390	90	85	26	20		293	118
250	620	521	800	450	800	340	1050	1760	335	535	DN40	760	24	40°	480	100	100	26	20	G1/2	392	205
300	700	600	870	500	880	400	1130	1860	375	575	DN40	775	24	45°	550	110	120	30	20		560	285

SUBJECT TO ALTERATIONS

AENDERUNGEN VORBEHALTEN

MODIFICATIONS RESERVEES

BACK FLUSHING FILTER

VOLLAUTOM.RUECKSPUELFILTER
TYP6.18 DN100-300 PN16

FILTRE AUTOMATIQUE