


DRUCKLUFT MIN. 4 BAR  
AIR PRESSURE  
PRESSION D'AIR  
LUFTANSCHLUSS  $\varnothing 8 \times 1$   
AIR CONNECTION  
PRISE D'AIR

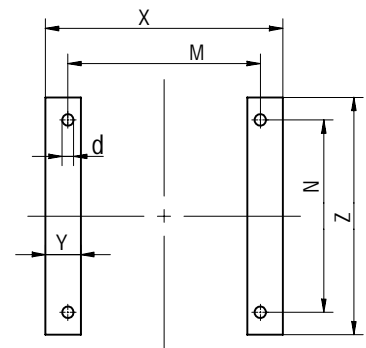

BODENBEFESTIGUNG  
BOTTOM FASTENING  
FIXATION AU FOND

ANSCHLUSSFLANSCH  
CONNECTION FLANGE  
BRIDES DESIREES

NP  
DIN 2501 ND 10  
PN

GEHAUSE GEGOSSEN  
CASTED HOUSING  
CORPS MOULE

FREIMASSTOLERANZEN  
TOLERANCE  
TOLERANCE

DIN ISO 2768-m

GR.	DN	KAMMER-ANZAHL	A	B	C	D	E	F	G	H	L	M	N	P	R	S	T	X	Y	Z	a	b	c	d	h	dn	GEWICHT KG	INHALT LTR
10	100	4	630	460	200	335	135	315	476	515	1110	200	200	250	95	300	200	270	55	270	105	165	225	18	15	50	215	38
15	150	7	700	690	310	365	165	375	476	605	1250	300	300	250	95	300	200	370	55	370	105	165	225	18	15	50	345	71
20	200	6	900	750	335	475	225	475	485	750	1420	400	400	350	125	300	250	500	75	500	165	165	240	27	25	100	620	150
25	250	8	1065	890	400	550	250	530	485	800	1535	470	470	350	125	300	250	570	75	570	165	165	240	27	25	100	726	230

SUBJECT TO ALTERATIONS!

AENDERUNGEN VORBEHALTEN!

MODIFICATIONS RESERVEES!

FULLY AUTOMATIC BACK  
FLUSHING FILTER

VOLLAUTO. RUECKSPUELFILTER  
TYP 6.61 GR.10-25 WZM-AUSF.

FILTRE AUTOMATIQUE